



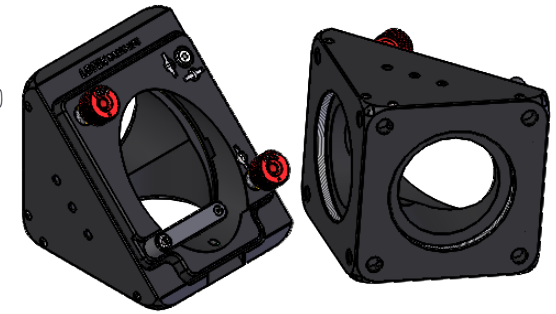


NYLON-TIPPED SET SCREW
FOR SECURING OF MOUNTED OPTIC
2.0mm [5/64in] HEX


B-B

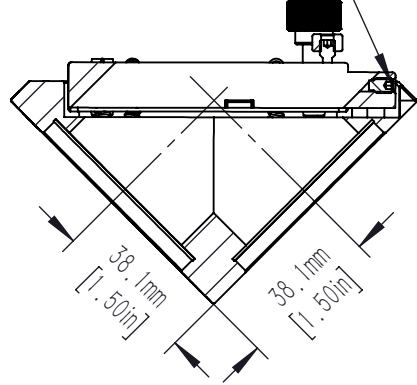

VIEW A
45.00°

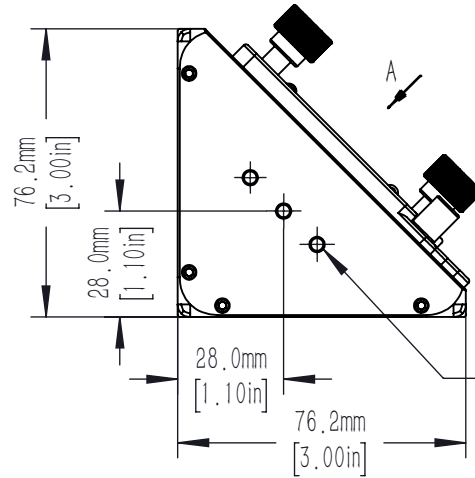


Ø42.0mm [Ø1.65in]
CLEAR APERTURE NOMINAL

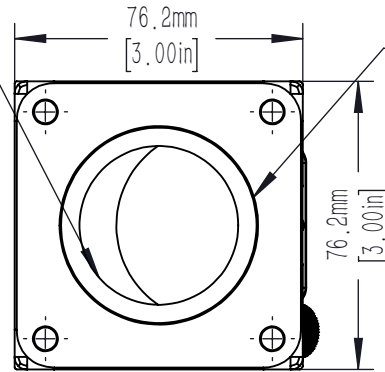


SM2 (Ø2.035-40) SERIES INTERNAL THREAD
8.8mm [0.35in] DEEP
2 PLACES TOTAL, 1 PER SIDE
Ø42.0mm [Ø1.65in] CLEAR APERTURE

Ø6.0mm [Ø0.24in] CAGE ROD BORE
5.8mm [0.23in] DEEP
FOR USE WITH MOP SERIES RODS
(NOT INCLUDED)
8 PLACES TOTAL, 4 PER SIDE




M6X1.0 TAPPED HOLE
8.0mm DEEP
3 PLACES

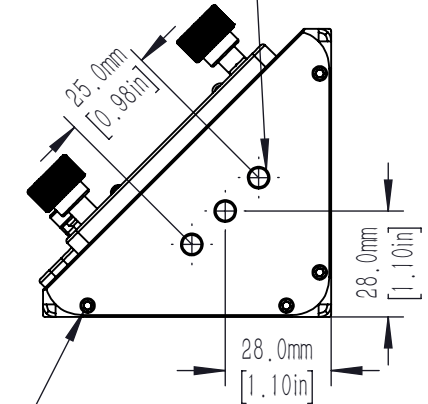

CAGE ROD LOCKING SET SCREW
2.0mm HEX
8 PLACES TOTAL, 4 PER SIDE


M6X0.25 ADJUSTER SCREW
FOR MIRROR SURFACE TRANSLATION
2.0mm [5/64in] HEX

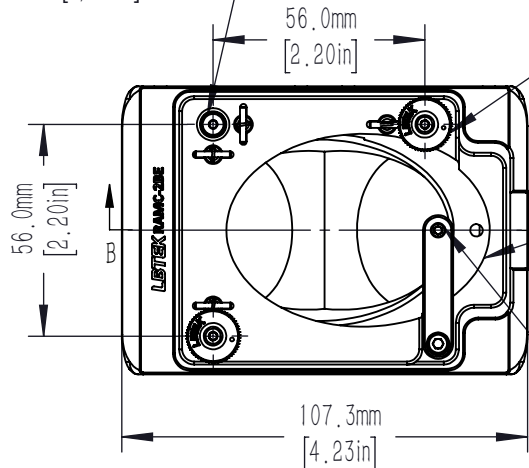

M6X0.25 ADJUSTER SCREWS
PROVIDES +/-3° TOTAL ANGULAR DISPLACEMENT
2 PLACES
2.0mm [5/64in] HEX

ACCEPTS 2.00in ELLIPTICAL OPTICS
(OPTIC NOT INCLUDED)

NYLON-TIPPED SET SCREW
FOR SECURING OF MOUNTED OPTIC
2.0mm [5/64in] HEX

DRAWING PROJECTION			 LBTEK			
	NAME	DATE				
	CZH	MAR./6th/20	RAMC-2BE			
DRAWN	CZH	MAR./6th/20	RIGHT ANGLE 60mm CAGE MOUNT FOR Ø50.8mm ELLIPTICAL OPTICS			
APPROVAL	ZXU	MAR./6th/20	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	0.45 Kg	1:2	B