
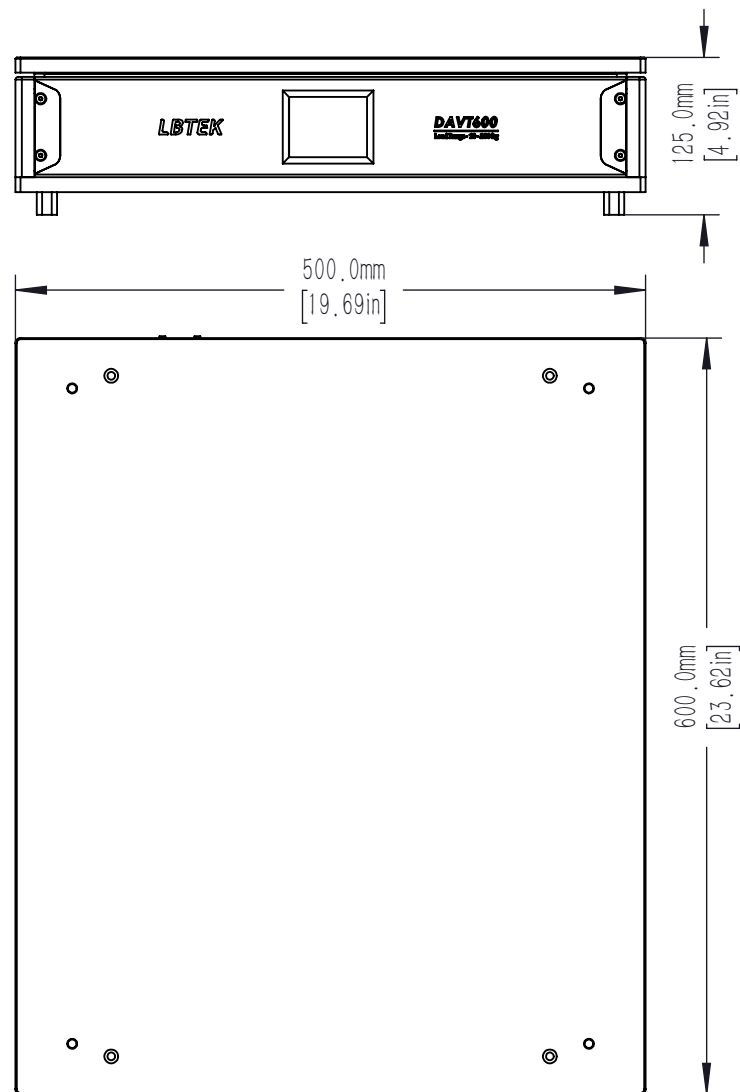


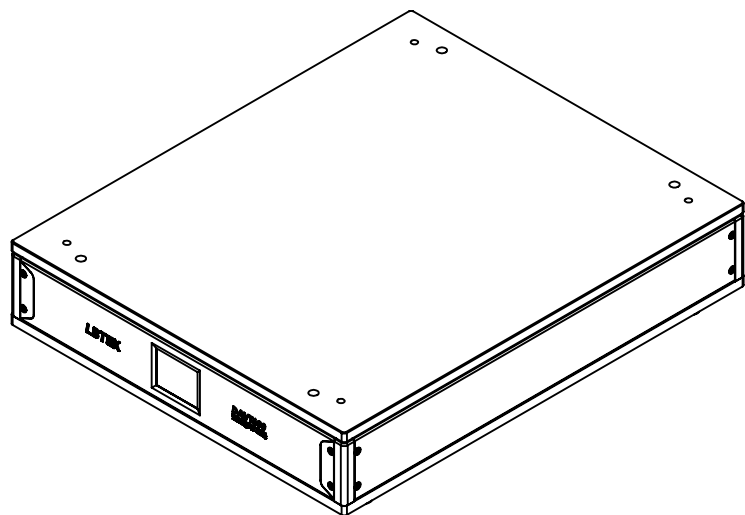

- 1.Product workload:10~200kg;
- 2.Isolation bandwidth:1~1000Hz;
- 3.Vibration isolation efficiency:60%@2Hz;90%@5Hz;99%@10Hz;
- 4.System vibration reduction degree of freedom:6;
- 5.Stabilization time:0.3s;
- 6.Power supply:AC220V/50Hz.

DRAWING PROJECTION 			LBTEK			
	NAME	DATE	DAVT600			
DRAWN	TL	SEP./11th/25	Desktop active vibration isolation platform			
APPROVAL	YHL	SEP./11th/25	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	38 Kg	1:10	A