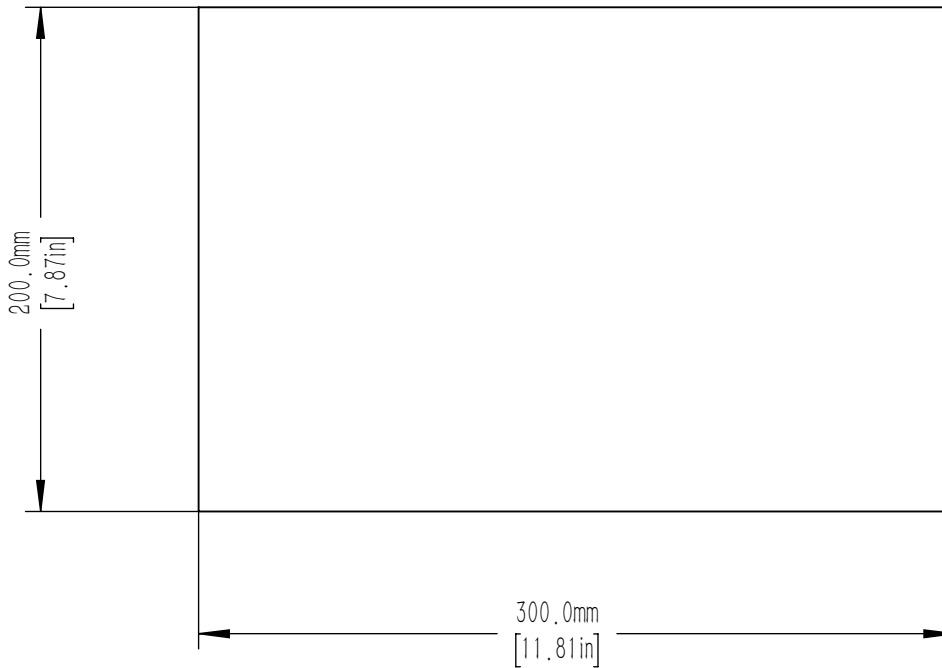


NOTES:

- 1.Substrate:Polyimide Film;
- 2.Thickness:0.1mm;
- 3.Coating Thickness: 2 - 5 μm ;
- 4.Dimension: 200mm $\times$ 300mm;
- 5.Absorptivity: 97.5%;
- 6.Hemispherical Reflectance: $\leq 2.5\%$;
- 7.Coating Density: 1.0 - 1.6 mg/cm^2 ;
- 8.Operating Temperature: $-250^{\circ}\text{C} \sim +250^{\circ}\text{C}$;
- 9.Material:100% Pure inorganic, No volatiles, RoHS-/REACH compliant.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

DRAWING PROJECTION			LBTEK			
	NAME	DATE	LAF975L-P			
DRAWN	SSO	DEC./6th/25	ALUMINUM FOIL MATTE FILM 200 X 300MM LOW OUTGASSING ADHESIVE			
APPROVAL	TLV	DEC./6th/25	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	0.005 Kg	1:3	A