

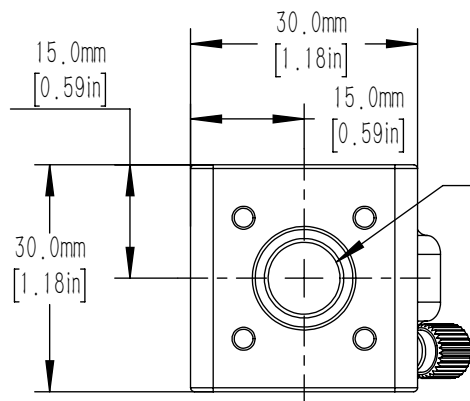


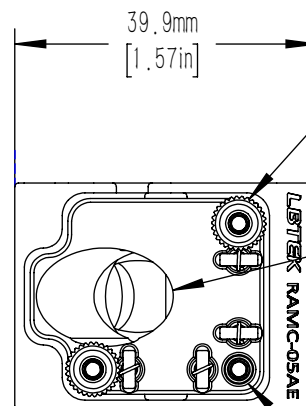



Ø 9.5mm [Ø 0.38in] THRU TO OPTIC FACE
SM05 (Ø 0.535-40) SERIES INTERNAL THREAD
3.8mm [0.15in] DEEP
2 PLACES @ 90° SEPARATION



M3 x 0.25 FINE ADJUSTMENT SCREW
WITH REMOVABLE KNOB
2.0mm HEX
2 PLACES




ACCEPTS LONG AXIS 18.0mm
SHORT SHAFT 12.7mm [0.5in] OPTICS
MINIMUM THICKNESS 3.0mm [0.12in]

M3 x 0.25 FINE ADJUSTMENT SCREW
FOR MIRROR SURFACE TRANSLATION
2.0mm HEX

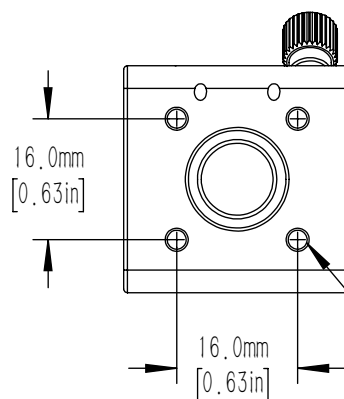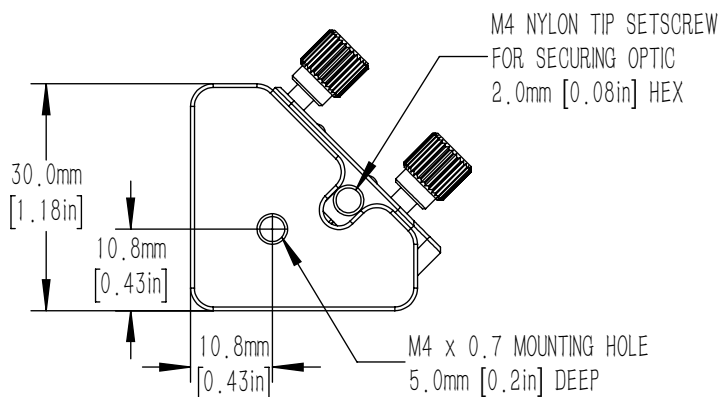

M3 MOUNTING HOLE
FOR USE WITH
Ø 4 mm SERIES RODS (NOT INCLUDED)
4 PLACES
BOTH SIDES

M3 x 0.5 MOUNTING HOLE
5.0mm [0.2in] DEEP

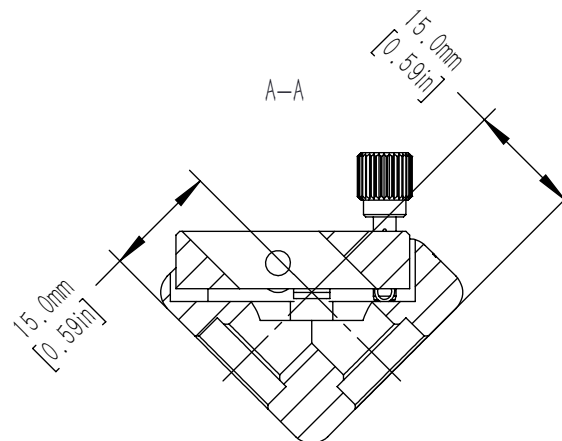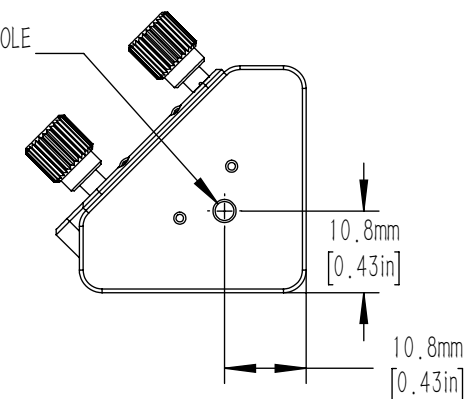

DRAWING PROJECTION			LBTEK			
	NAME	DATE	RAMC-05AE			
DRAWN	HDE	Aug./10th/23	RIGHT ANGLE KINEMATIC CAGE BLOCK FOR 1/2" ELLIPTICAL OPTICS			
APPROVAL	ZXU	Aug./10th/23	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	0.045 Kg	1:1	B